

# PE/IEPE Signal Conditioner

## Model 133



### Key features

- Three-channel PE/IEPE signal conditioner
- 200 kHz bandwidth (-3dB Corner)
- Built-in 4-pole Butterworth high-pass filter with optional corner frequencies
- Gain range 0 to 1,000
- 12 VDC power option

### Description

Model 133 is a three-channel, Piezoelectric and IEPE signal conditioner that is manually or computer programmable. Manual control is accomplished at the front panel by means of a "Select Channel" push-button, three (3) "Channel LEDs", one "Select Function" push-button, seven "Function LEDs", a four character LED display, showing the state of each function/channel, and four "Edit" push-buttons to change the entries in the LED display. There are three LEDs used as fault status indicators for open/short at the IEPE inputs.

There are two modes of operation, Normal and Programming/Setup. Both modes of operation utilize the front panel LED display. In the Normal Mode, there are two states, Monitoring and Non-Monitoring. In the Monitoring state the LED display indicates the RMS value ( $\pm 10\%$ ) of the signal present at the output of the selected channel. The Non-Monitoring state turns off the LED display for lower noise applications and to minimize power consumption. In the Programming Mode, the unit is ready for manual programming of existing channel setups. The unit will automatically return to the Normal Mode of operation after 20 seconds of inactivity of the front panel or after pressing the "Select Function" pushbutton while the "Monitoring State" function LED is flashing.




The rear panel contains an RJ-11 connector (RS-232 serial communication is no longer supported), an input power connector, and on a per-channel basis, a BNC output connector, a 10-32 input connector for the PE input, and a BNC connector for the IEPE input. Three model 133 units may be installed in a 19-inch rack mount adapter. The standard unit is powered by 90-264 VAC, 50/60 Hz. The -1 option is powered by 12 to 18 VDC, making it ideal for portable use in automobile test applications.

## PE / IEPE signal conditioner | Model 133

The following performance specifications conform to ISA-RP-37.2 (1964) and are typical values, referenced at +75°F (+24°C) and 100 Hz, unless otherwise noted.

Specifications	
<b>Input specifications (per channel)</b>	
Piezoelectric	Single-ended with one side connected to signal ground
Maximum charge input	10,000 pC
Source resistance	10 MΩ
Source capacitance	< 30,000 pF
IEPE	Single-ended with low side connected to signal ground
Excitation current accuracy	Off, 4 mA or 10 mA ± 15%, one range is valid for all 3 channels selectable through front panel or RS-232
Compliance voltage	< 22 VDC
Maximum input voltage	< 22 Volts (AC + DC components)
Input impedance	100 MOhms and 33 000 pF
<b>Output characteristics</b>	
AC voltage	Single ended with one side connected to output signal ground. Signal proportional to input.
Minimum linear output	10 Vpk minimum
Display non-linearity	Inherent error 1% of full scale reading 10 V = 1%; 1 V = 10%; 100 mV = 100%
Maximum current output	10 mA (10 V into a 1 kOhm load)
DC offset	15 mV maximum
Protection	Short circuit protected
<b>Transfer characteristics</b>	
Gain	
Range	Programmable from 0 to 1,000
Resolution	0.0025, Eu 0 ≤ gain ≤ 10 0.025, Eu 10 ≤ gain ≤ 100 0.25, Eu 100 ≤ gain ≤ 1000 ± 0.5% at 1 kHz after calibration, filters disabled, gain > 1 0.1% of full scale, best fit straight line at 1 kHz reference Noise specification valid for the following conditions:
Accuracy	± 0.5% at 1 kHz after calibration, filters disabled, gain > 1
Linearity	0.1% of full scale, best fit straight line at 1 kHz reference
Noise	Noise specification valid for the following conditions: (a) unit in non-monitoring state (b) internal standard 10 kHz 4-pole butterworth lowpass filter enabled
Piezoelectric	0.02 pC-RMS plus 0.006 pc-RMS per 1000 pF of source capacitance referred to input (RTI), plus 1 mVRMS referred to output (RTO).
IEPE	0 μVRMS referred to input (RTI), plus 400 μVRMS referred to output (RTO). Input shunted with a 249 Ohm (4 mA excitation) or 100 Ohms load (10 mA excitation).
Broadband frequency response	±5%, 0.1 Hz to 50 kHz, referenced to 1 kHz; -3dB at 200 kHz typical
<b>Filter characteristics</b>	
High pass filter type	4-pole butterworth
Corner frequency (-3 dB)	10 hz ± 5 %
Corner frequency (-3 dB)	10 khz ± 12 % (other corners available by changing internal module 31875: 10 Hz to 80 kHz in 1, 2, 4, 6, 8 steps)
Crosstalk between channels	80 dB RTI minimum
<b>Power requirements</b>	
Voltage	Standard unit: 90-264 VAC 50 to 60 Hz; -1 option: 9-18 VDC
Power dissipation	9 Watts typical
Isolation	No isolation channel to channel or signal ground to case ground
<b>Physical characteristics</b>	
Dimensions	5.57" x 2.52" x 12"
Weight	4 lbs typical
Case material	Black aluminum cover, medium grey plastic bezel

Accessories			
Product	Description	133	133-1
IM133	Instruction manual	Download from website	Download from website
EW1006-U	AC Power cord, 10 ft, 18 AWG	Included	N/A
EHM1409	Automotive power plug	N/A	Included
31875-1000	10kHz 4-pole Butterworth low-pass filter module	Included	Included
31875-xxxx	Low-pass filter modules (see 31875 data sheet)	Optional	Optional
EJ1183	10-32 microdot to BNC adapter (qty 3)	Included	Included
EHM1413	Desktop DC power supply (Model 133-1)	N/A	Optional
31979	Rack mounting kit	Optional	Optional
EHM1471	Blank panel for Rack mount	Optional	Optional
EJ807	Serial DB9 tp RJ11 adaptor	Included	Included

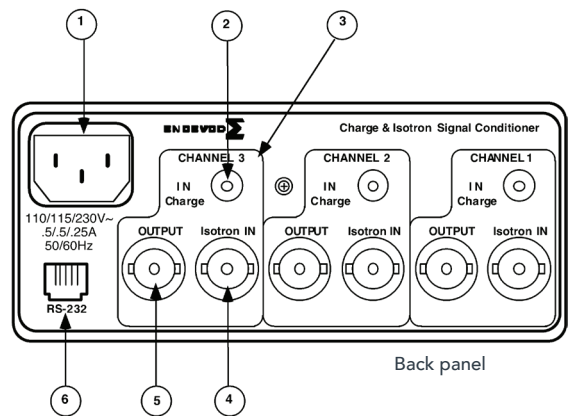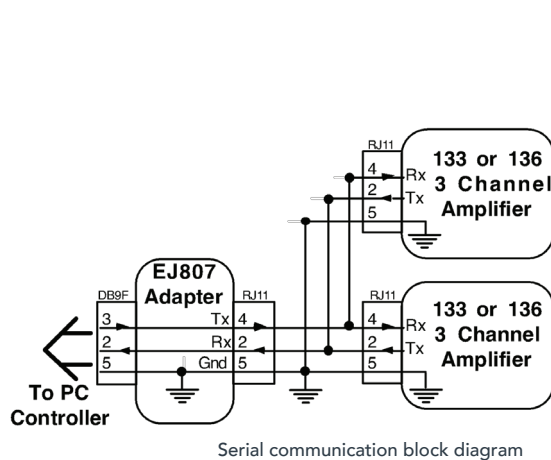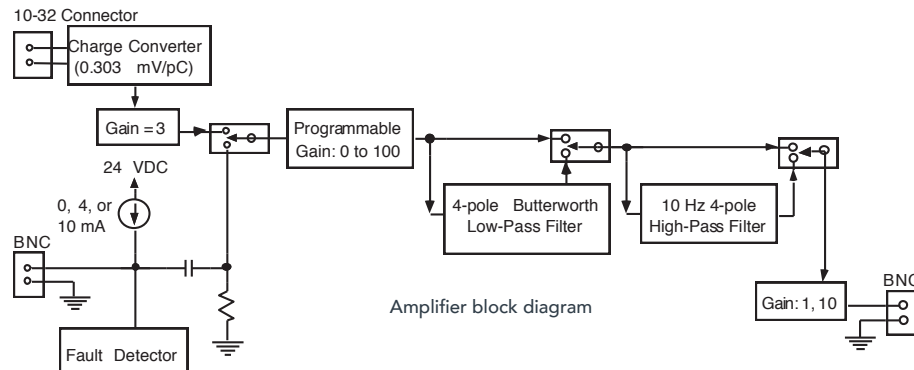

www.endevco.com | Tel: +1 (866) ENDEVCO [+1 (866) 363-3826] | 10869 NC-903, Halifax, NC 27839 USA

© 2020 PCB Piezotronics of North Carolina, Inc. (doing business as Endevco). In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12TM is a trademark of PCB Piezotronics, Inc. SensorLine<sup>SM</sup> is a servicemark of PCB Piezotronics, Inc. MTS®, MTS Sensors logo, Temposonics®, SWIFT®, R Series V®, TempoLink®, and RefineMe® are registered trademarks of MTS Systems Corporation in the United States. These marks may be registered or otherwise protected in other countries. Endevco® is a registered trademark of PCB Piezotronics of North Carolina, Inc. d/b/a Endevco in the United States.