

# Single-Mode Damping vs. Multi-Mode Damping


---

Technical Paper 342  
By Anthony Chu

In a traditional single degree of freedom (single mode) model, the primary natural frequency of the accelerometer is used to determine its transfer characteristics. Damping ratio of an accelerometer can range from almost undamped ( $<0.005$  of critical) to over-damped ( $>0.7$  of critical). For approximation, the damping ratio is practically equal to half of the sensitivity of the accelerometer at its reference frequency (typically at 100Hz) divided by the sensitivity of the accelerometer at its natural frequency ( $= 0.5 \times \text{Sens @ } f_r / \text{Sens @ } f_n$ ). The term "damping ratio" is used by engineers to assess how much damping is built into the accelerometer. To effectively control the sensor response near its resonance, damping ratio  $>0.7$  is often used. The trade-off in applying over-damping design is that the "flat" amplitude response below the sensor resonance is greatly limited. Meggitt has developed a multi-mode damping model in which the mechanism of the MEMS sensing system is tuned to make use of not only the primary resonance mode, but also its secondary resonance. Because the two resonances are designed to be closely spaced, their damping characteristics interact with each other to yield a desirable frequency response. The benefit of this interaction is an extended "flat" response up to very high frequency that still retains a high degree of damping to control the amplification at its resonances. Since we are dealing with two resonance modes all at once, the typical damping ratio approximation, which is meant to describe the behavior of a single second order system, no longer applies.



In short, the term "damping ratio" typically associated with a single second order system is inadequate in describing the effectiveness of damping in a multi-mode damping design. Instead, one should pay attention to the actual frequency response of the sensor. The figure below shows the frequency response of a multi-mode damped accelerometer with primary resonance (1st mode) at 25kHz and secondary resonance (2nd mode) at 36kHz. Note these resonances are virtually unnoticeable in the calibration sweep because they have been effectively eliminated by careful sensor design tuning. This allows a usable bandwidth up to 40kHz which is unobtainable in previous generations of accelerometer design.

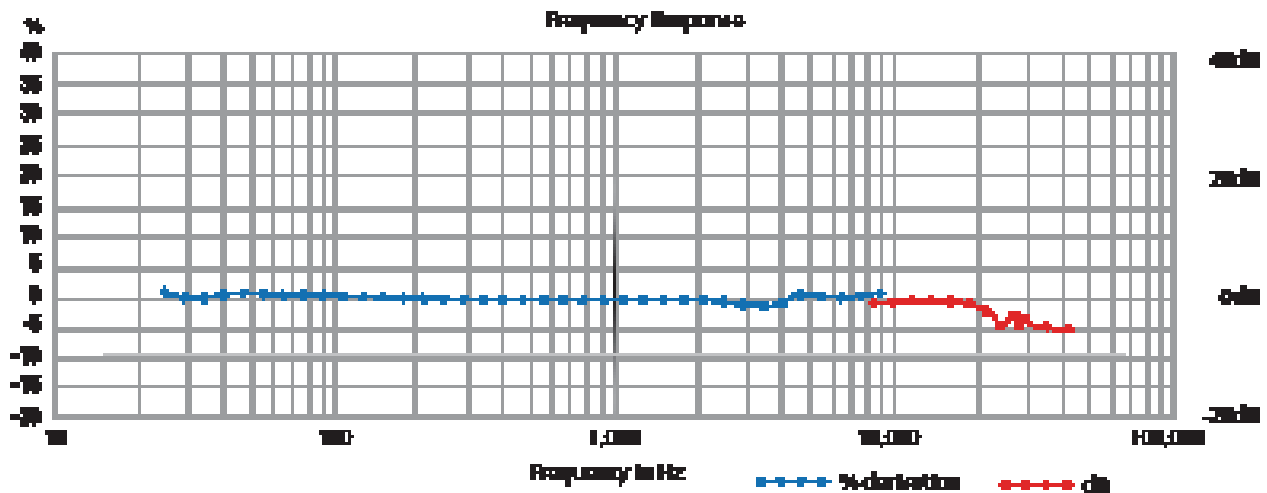



[www.endevco.com](http://www.endevco.com) | Tel: +1 (866) ENDEVCO [+1 (866) 363-3826] | 10869 NC-903, Halifax, NC 27839 USA

© 2020 PCB Piezotronics of North Carolina, Inc. (doing business as Endevco). In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12TM is a trademark of PCB Piezotronics, Inc. SensorLine<sup>SM</sup> is a servicemark of PCB Piezotronics, Inc. MTS®, MTS Sensors logo, Temposonics®, SWIFT®, R Series V®, TempoLink®, and RefineMe® are registered trademarks of MTS Systems Corporation in the United States. These marks may be registered or otherwise protected in other countries. Endevco® is a registered trademark of PCB Piezotronics of North Carolina, Inc. d/b/a Endevco in the United States.

031620

**MTS**  
SENSORS

Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc. and is a designer and manufacturer of sensors, instrumentation, and cables for vibration, shock and pressure measurements, known for innovation of sensor technology for the automotive, aerospace and military markets. Visit [www.endevco.com](http://www.endevco.com) for more information. PCB Piezotronics of North Carolina, Inc. (doing business as Endevco) is a wholly owned subsidiary of PCB Piezotronics, Inc. PCB Piezotronics, Inc. is a designer and manufacturer of microphones, and vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, and OEM applications. PCB also manufactures the Endevco product line of sensors, instrumentation and cables for vibration, shock and pressure measurements. With a worldwide customer support team, 24-hour SensorLine<sup>SM</sup>, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit [www.pcb.com](http://www.pcb.com) for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at [www.mts.com](http://www.mts.com).