

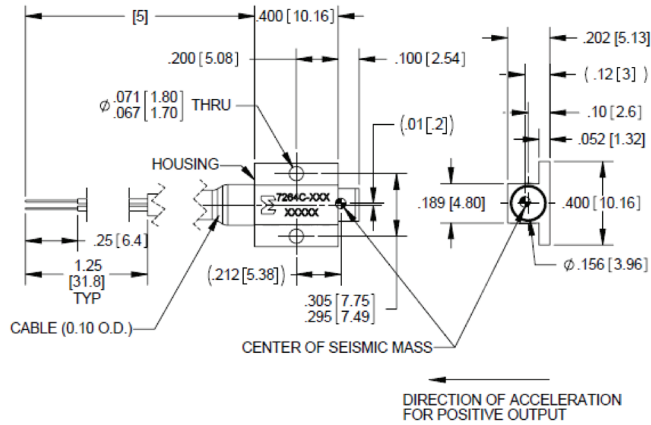


# Piezoresistive accelerometer

## Model 7264C

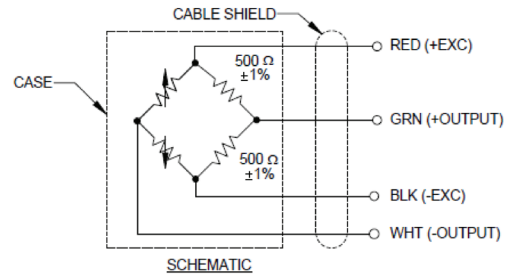

STANDARD TOLERANCE  
INCHES (MILLIMETERS)  
.XX = ± .03 (X = ± .8)  
.XXX = ± .010 (XX = ± .25)

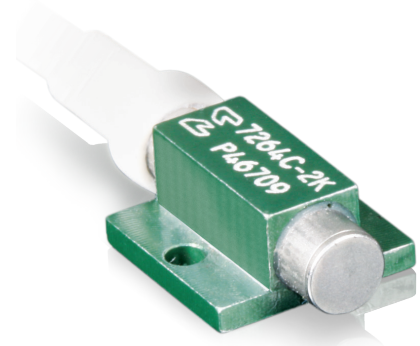

### Key features

- 500 g and 2000 g full scale ranges
- DC response - long duration transients
- 0.005 damping ratio - meets NHTSA SA572-S4
- Mechanical overtravel stops
- Small size, rugged
- Crash and shock testing

### Description

Model 7264C is a very low mass piezoresistive accelerometer weighing about 1 gram. This accelerometer is designed for crash testing, rough road testing and similar applications that require minimal mass loading and a broad frequency response. This accelerometer meets SAEJ211 specifications for instrumentation for impact testing and SAEJ2570 specification for anthropomorphic testing. It is a direct replacement for model 7264-2000 in that the location of the center of seismic mass is the same.

7264C utilizes an advanced micromachined sensor, which includes integral mechanical stops. This monolithic sensor offers improved ruggedness, stability and reliability over previous designs. 7264C features an undamped sensor design which meets the NHTSA SA572-S4 requirement of 0.005 damping ratio. With a frequency response extending down to dc (steady state acceleration), this accelerometer is ideal for measuring long duration transient shocks and critical for deriving velocity data from acceleration.

This accelerometer has a full bridge circuit with fixed resistors for shunt calibration. Full scale output is 400 mV with 10Vdc excitation. It is also available with less than 1% transverse sensitivity ("T" option) and less than ±25 mV zero measurand output ("Z" option).

Recommended electronics for signal conditioning and power supply are the Endevco brand model 126 and 136 and model 436, a general purpose three channel DC conditioner and power supply. U.S. Patents 4,498,229 and 4,605,919 apply.

## Piezoresistive accelerometer | Model 7264C

The following performance specifications conform to ISA-RP-37.2 (1964) and are typical values, referenced at +75°F (+24°C) and 100 Hz, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.


<b>Specifications</b>			
<b>Dynamic characteristics</b>	<b>Units</b>	<b>7264C-500</b>	<b>7264C-2000</b>
Range	g	± 500	±2000
Sensitivity (at 100 Hz & 10 g)	mV/g typ (min)	0.80 (0.40)	0.20 (0.15)
Frequency response	Hz		
(± 2% max, ref. 100 Hz)			0 to 2000
(± 5% max, ref. 100 Hz)		0 to 3000	0 to 5000
Mounted resonance frequency	Hz	17 000	26 000
Damping ratio	Max	0.005	0.005
Non-linearity			
(% of reading, to full range)	% max	±1	±1
Repeatability			
(after full scale shock)	Equiv. g	0.2	0.2
Transverse sensitivity [1]	% max	3 (1 optional)	3 (1 optional)
Zero measurand output [2]	mV max	± 50 (± 25 optional)	± 50 (± 25 optional)
Thermal zero shift	mV typ	± 10	± 10
From 0°F to +150°F (-18°C to +66°C), ref 75°F (24°C)	mV max	± 25	± 25
Thermal sensitivity shift	%/°F typ	-0.06	-0.06
From 0°F to +150°F (-18°C to +66°C)	%/°C typ	-0.10	-0.10
From 65°F to +85°F (+18°C to +29°C), ref 75°F (24°C)	± % typ	± 1.0	± 1.0
Warm-up time	ms typ	1	1
Base strain sensitivity (per ISA 37.2 @ 250 µ strain)	Equiv. g's	< 0.1	< 0.1
Mechanical overtravel stops	g's	1500 g typical, 750 g minimum	5000 g typical, 2500 g minimum
<b>Electrical characteristics</b>			
Excitation [3]		5 Vdc and 10 Vdc	
Input resistance [4]		300 to 900 ohms	
Output resistance [4]		400 to 1600 ohms	
Fixed resistors		500 ohms ± 1%	
Insulation resistance		100 megohms minimum at 50 Vdc; leads to case and to shield	
<b>Physical characteristics</b>			
Case material		Green anodized aluminum alloy	
Electrical connections		Integral cable, four conductor No. 32 AWG Teflon® insulated leads, braided shield, White silicone jacket	
Mounting torque		Holes for two 0-80 mounting screws/2.6in-lbf (0.29Nm) recommended	
Weight		1.4 gram (cable weighs 9 grams/meter)	
<b>Environmental characteristics</b>			
Acceleration limits (in any direction)			
Static		5000 g	10 000 g
Sinusoidal vibration		1000 g pk below 3 kHz	1000 g pk below 5 kHz
Shock (half-sine pulse duration)		5000 g, 300 µsec or longer	10 000 g, 200 µsec or longer
Temperature			
Operating		0°F to +150°F (-18°C to +66°C)	
Storage		-65°F to +250°F (-54°C to +121°C)	
<b>Calibration data supplied [6]</b>			
Sensitivity (at 100 Hz and 10 g pk)		mV/g at 5.0 Vdc and 10.0 Vd	
Frequency response		20 Hz to 3000 Hz, % deviation reference 100 Hz; dB plot continued from 3000 to 30 000 Hz for 7264C-500: 20 Hz to 5000 Hz, % deviation reference 100 Hz; dB plot continued from 5000 to 30 000 Hz for 7264C-2000	
Zero measurand output		mV at 5.0 Vdc and 10.0 Vdc	
Maximum transverse sensitivity		% of sensitivity	
Input and output resistance		Ohms	

# Piezoresistive accelerometer | Model 7264C

Accessories		
Options	Description	7264C
EHM35	Allen wrench	Included
EHW196	Size-0 flat washers (x2)	Included
EH828	0-80 x 3/16 inch socket head cap screw (x2)	Included
24328-3	Conductor shielded cable	Optional
7953A	Triaxial mounting block	Optional

## Notes

- 1% transverse sensitivity available as "T" option.
- 25 mV zero measurand output available as "Z" option.
- Intermittent excitation voltages up to 12.0 Vdc may be used, but should be specified at time of order to obtain best calibration.
- Measurand at approximately 1 Vdc. Bridge resistance increases with applied voltage due to heat dissipation in the strain gage elements.
- Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.
- Model number definition:

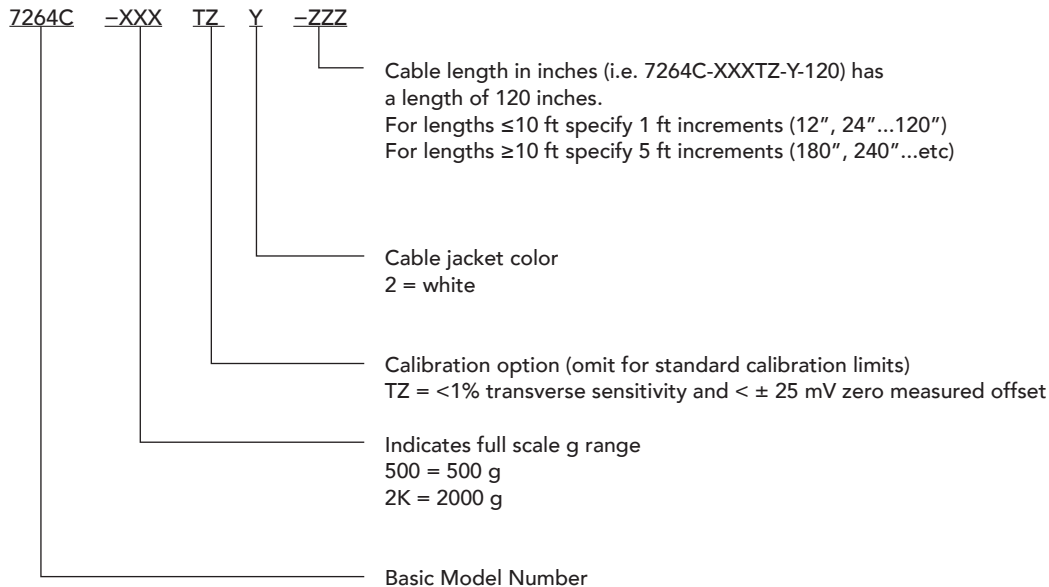

www.endevco.com | Tel: +1 (866) ENDEVCO [+1 (866) 363-3826] | 10869 NC-903, Halifax, NC 27839 USA

© 2020 PCB Piezotronics of North Carolina, Inc. (doing business as Endevco). In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12TM is a trademark of PCB Piezotronics, Inc. SensorLine<sup>SM</sup> is a servicemark of PCB Piezotronics, Inc. MTS®, MTS Sensors logo, Temposonics®, SWIFT®, R Series V®, TempoLink®, and RefineMe® are registered trademarks of MTS Systems Corporation in the United States. These marks may be registered or otherwise protected in other countries. Endevco® is a registered trademark of PCB Piezotronics of North Carolina, Inc. d/b/a Endevco in the United States.

070220



Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc. and is a designer and manufacturer of sensors, instrumentation, and cables for vibration, shock and pressure measurements, known for innovation of sensor technology for the automotive, aerospace and military markets. Visit [www.endevco.com](http://www.endevco.com) for more information. PCB Piezotronics of North Carolina, Inc. (doing business as Endevco) is a wholly owned subsidiary of PCB Piezotronics, Inc. PCB Piezotronics, Inc. is a designer and manufacturer of microphones, and vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, and OEM applications. PCB also manufactures the Endevco product line of sensors, instrumentation and cables for vibration, shock and pressure measurements. With a worldwide customer support team, 24-hour SensorLine<sup>SM</sup>, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit [www.pcb.com](http://www.pcb.com) for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at [www.mts.com](http://www.mts.com).