



Standard low impedance cable assemblies

Model 3006, 3024, 3027A, 3027AM3, 3027AM4 and 3061




3006

Endeveco's model 3006 cable is a miniature Teflon® jacketed coaxial cable that mates with a special 1.20 UNM Endeveco receptacle on one end and a 10-32 type plug on the other end. It is intended for use with low impedance transducers, such as Endeveco model 25B and 2250A Isotron® accelerometers that do not require noise treated cables. The model 3006 is temperature rated from -58°F to +257°F.



3024

The Endeveco model 3024 cable is a low-cost twisted pair cable with Teflon® insulated conductors. No shielding or overall jacket is provided. It is designed to be used with low impedance transducers, such as Endeveco model 25A, 2250AM1, 2255B and 7255A Isotron® accelerometers. The accelerometer end of the cable is soldered to the leads extending from the accelerometer, and the other end is terminated with a 10-32 center pin connector. The cable is not shielded or noise treated and should not be used with high impedance piezoelectric accelerometers. Model 3024M1 is a shielded, S.P. copper braid, version of the model 3024. This version is designed for high noise and EMI environments. This cable is temperature rated from -300°F to +350°F.



3027A


The Endeveco model 3027A cable assembly is a four conductor shielded cable designed to operate with low impedance accelerometers. This cable utilizes the solderless crimp style conductor to pin method. The shield is crimped and soldered to the connector case. The outer jacket is gray silicone with an internal Teflon® insulation. There is a four pin receptacle at the accelerometer end and tinned leads at the other end. The 3027A is designed to be used with model 63A and 2258AM2 accelerometers. The temperature rating for this cable assembly is -148°F to +257°F

Key features

- Low impedance piezoelectric accelerometers


Standard low impedance cable assemblies

Model 3006, 3024, 3027A, 3027AM3, 3027AM4 and 3061

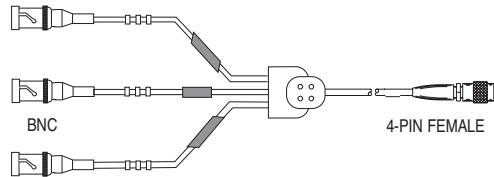


3027AM3

The Endevco model 3027AM3 is a cable assembly designed to mate with triaxial Isotron® accelerometers such as models 63A & 2258AM2. One end of the cable assembly features a 4-pin receptacle while the other end branches into 3 male BNC plugs. The 3027AM3 is temperature rated from -67°F to +185°F.



3027AM4

The Endevco model 3027AM4 is an extension cable for use with the 3027AM3 cable assembly. This cable has a male 4-pin connector at one end and a female version at the other. The temperature rating for this cable assembly is -148°F to +257°F.



3061

The Endevco model 3061 cable is a non-low noise treated version of the 3090CM12 cable assembly. This cable has a male 10-32 miniature coax connector at one end and a male BNC at the other. The model 3061 is temperature rated from -85°F to +350°F.

Standard low impedance cable assemblies

Model 3006, 3024, 3027A, 3027AM3, 3027AM4 and 3061

Specifications

Dynamic characteristics		3006	3024/M1	3027A	3027AM3	3027AM4	3061
Capacity, nominal	pF/ft.	42	N/A	16	30	16	28
Resistance, nominal	Ω/100 ft.	35	6.5	30	20	30	28
Physical characteristics							
Conductor							
Size	AWG	36 19/40	28 7/40	32 10/38	28 7/40	32 7/38	30 7/38
Material		copper	copper	copper	copper	copper	copper
Primary insulation		Teflon®	Teflon®	Teflon®	PVC	Teflon®	Teflon®
Shield		gold plated copper	N/A (M1, s.p. copper)	copper	Alumylar c	opper	copper
Jacket	Material	Flouorocarbon	Teflon®	Silicone	PVC	Silicone	Teflon®
Overall diameter	in.	0.035	0.094	0.105	0.105	0.105	0.080
Weight (nominal)	gm/ft.	1/2	3 1/2	4 1/2	4 1/2	4 1/2	3 1/2
Bend radius, min.	in.	0.120	0.750	0.50	0.850	0.50	0.950
Connector characteristics							
Type		.120 UNM to 10-32	tinned leads to 10-32	4-pin rec. to tinned leads	4-pin rec. to 3x BNC	4-pin plug 4-pin rec.	10-32 to BNC
Environmental characteristics							
Temperature range	°F	-58 to +257	-300 to +350	-148 to +257	-67 to +185	-148 to +257	-85 to +330

Notes:

1. Maintain high levels of precision and accuracy using Endeveco's factory calibration services. Call Endeveco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.

Contact

ENDEVCO
 www.endevco.com
 Tel: +1 (866) ENDEVCO
 [+1 (866) 363-3826]